


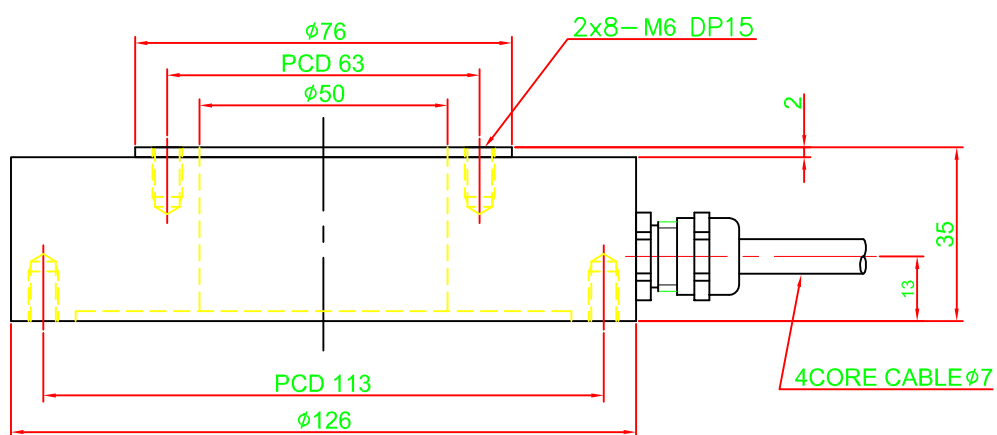

MODEL	CKW-10T
RATED CAPACITY (R.C.)	10H
RATED OUTPUT (R.O.)	1.0mV/V $\pm$ 0.4%
NON-LINEARITY	1% R.O.
HYSTERESIS	0.5% R.O.
REPEATABILITY	0.5% R.O.
ZERO BALANCE	$\pm$ 1% R.O.
TEMP. RANGE COMPENSATED	-10°C~50°C
SAFE TEMPERATURE RANGE	-20°C~70°C
TEMP. EFFECT ON RATED OUTPUT	$\pm$ 0.05%LOAD/10°C
TEMP. EFFECT ON ZERO BALANCE	$\pm$ 0.1%R.O./10°C
RESISTANCE, INPUT	700 Ω $\pm$ 10 Ω
RESISTANCE, OUTPUT	700 Ω $\pm$ 5 Ω
INSULATION RESISTANCE BRIDGE TO GROUND	2000M Ω
ELECTRICAL CONNECTION	$\phi 7$ x 4C x5m
EXC. RECOMMENDED	10V
SAFE OVERLOAD	150% R.C.

1	DESCRIPTION	MATERIAL	HEART TREAT	Q'TY	DIMENSIONS	REM
NO	DESCRIPTION					
CHAMFER		SCALE	ANGLE	1st	DESCRIPTION	
☐ C 0.1	☐ C 0.3	1 : 1	☒ 30°		LOAD CELL	
☒ C 0.5	☐ C 1	DRAWN BY	PLANNED BY	CHECKED BY	APPROVED BY	MODEL
TOLERANCE LIMITS		S.W.LEE				ORDER
☒ MM	☐ INCH					CKW-10T
						ORDER DWG. NO